



KERN
TECHNOLOGIES, LLC.

KT650

LightWAVE®

Industrial CO₂ Lasers



Laser

Characteristics

- Liquid Cooled
- RF Excited
- Wide Operating Power Range
- Exceptional Power Stability
±6%
- Fast Rise and Fall Time
- Pulsed up to Quasi-CW
Operation

Standard Features

- Integrated Carry Handles
- Metal Sealed Laser Cavity
- Internally Collimated
- Integrated RF
- Common Footprint
- Overbuilt Electronics
- Three Point Mounting
- Manufactured in the USA

LASER CHARACTERISTICS

OUTPUT POWER ¹	≥ 650 watts
POWER RANGE	30-650 watts
PEAK POWER ²	> 1800 watts
DUTY CYCLE RANGE	≤ 75%
POWER STABILITY ³	± 6%
MAXIMUM PULSE ENERGY	> 2400 mJ
PULSE LENGTH	≤ 3.75 ms
PULSE RISE/FALL TIME	40/60 μs
MODE QUALITY	M ² < 1.2
BEAM ELLIPTICITY	< 1.2
BEAM DIAMETER AT LASER OUTPUT	0.35" ± 0.04" (9.0 mm ± 1.0 mm)
BEAM DIVERGENCE (FULL ANGLE)	< 2.5 mrad
POLARIZATION	Linear (parallel to baseplate)
MODULATION FREQUENCY	200 Hz to 200 kHz
WAVELENGTH	10.6 μm

PHYSICAL CHARACTERISTICS

WEIGHT	130 lbs. [59 kg]
DIMENSIONS	47.25" x 10" x 10.1" [1200 x 254 x 257 mm]

ELECTRICAL REQUIREMENTS

DC INPUT VOLTAGE	48 V
DC PEAK CURRENT	300 A
DC CONTINUOUS CURRENT	< 220 A



COOLING REQUIREMENTS⁴

HEAT LOAD	< 11 kW
FLOW RATE	≥ 6 GPM (≥ 22.7 L/min)
COOLANT MAXIMUM PRESSURE	100 PSI
COOLANT	Distilled water with corrosion inhibitor
COOLANT SETPOINT TEMP.	68°F - 77°F (20°C - 25°C)
COOLANT TEMP. STABILITY	± 1°F (± 0.5°C)

ENVIRONMENTAL CONDITIONS

AMBIENT TEMP. RANGE	50°F - 100°F [10°C - 38°C]
RELATIVE HUMIDITY	< 95% non-condensing
ALTITUDE	≤ 6500 ft. (2000 m)

MECHANICAL SPECIFICATIONS

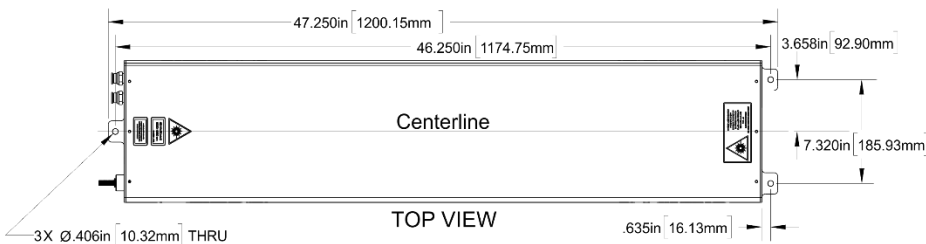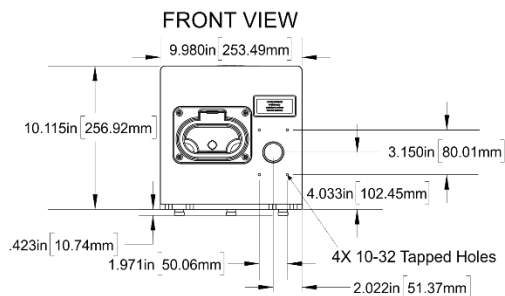

Disclaimer

The laser is a component of a laser system. It is the responsibility of the OEM to provide all required laser safety features. Check with CDRH for safety requirements. Do not operate laser without proper safety training. The laser parameters listed within this sheet are subject to change without notice.

¹ Measured at maximum duty cycle and a 5.0 kHz pulse repetition frequency (PRF).
² Measured at 10% duty cycle at 1 kHz PRF.
³ Power stability may not be met at low duty cycle or acoustic PRF.
⁴ Refer to the manual for details.



1503 Industrial Drive
 Wadena, MN 56482 USA
 P: 218-632-5810
 F: 218-632-5811
 TF: 855-634-2436
 EM: info@kerntechnologies.com